

DRA
WE RESERVE THE
STANDARD PRODUCT
PRIOR TO USING T



2.27 [57.8]

 \bigcirc

 \bigcirc

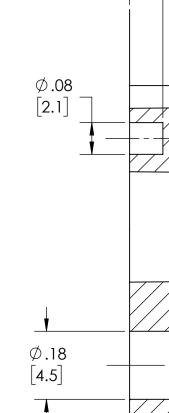

.09 [2.2]



NOTES:

- 1. MATERIAL AND FLAMMABILITY. POLYCARBONATE (LIGHT GRAY AND CLEAR) - UL94-HB BODY, COVER AND CLEAR COVER (C) FLAMMABILITY RATING (UL FILE #E41613) SERVICE TEMPUTER RANGE: -40°C TO +120°C
- 2. UL 508A (E352997) UL CERT OF COMPLIANCE.: BOXES UL LISTED NEMA TYPE 6P STANDARD. DESIGNED MEETS IP68 OF IEC529 REQUIREMENTS. PC VERSION UV RESISTANT FOR OUT DOOR USE.

4.13 [105.0]

3.57

[90.8]

3.27

[83.0]

9.91 [251.8]

8.82 [224.1]

A-

Ø.54 [13.6]

_M3X4MM SELF-TAPPING

SCREWS (NOT SUPPLIED) X 8

BODY

3.60

[91.4]

Y

4.13 [105.0]

3.60

[91.4]

_M4X20 PAN HEAD

SCREWS X 6

3.57

[90.8]

3.27

[83.0]

- 3. GASKET (NOT INSTALLED) MOLDED SILICONE WHITE
- 4. DIMENSIONS ARE INCH

5.80 4.03 [147.4] [102.4]

.89 [22.5]

 \bigcirc


.55 [13.9] —

 $\overline{\mathbb{O}}$

 \bigcirc

 \bigcirc

PART NAME BID

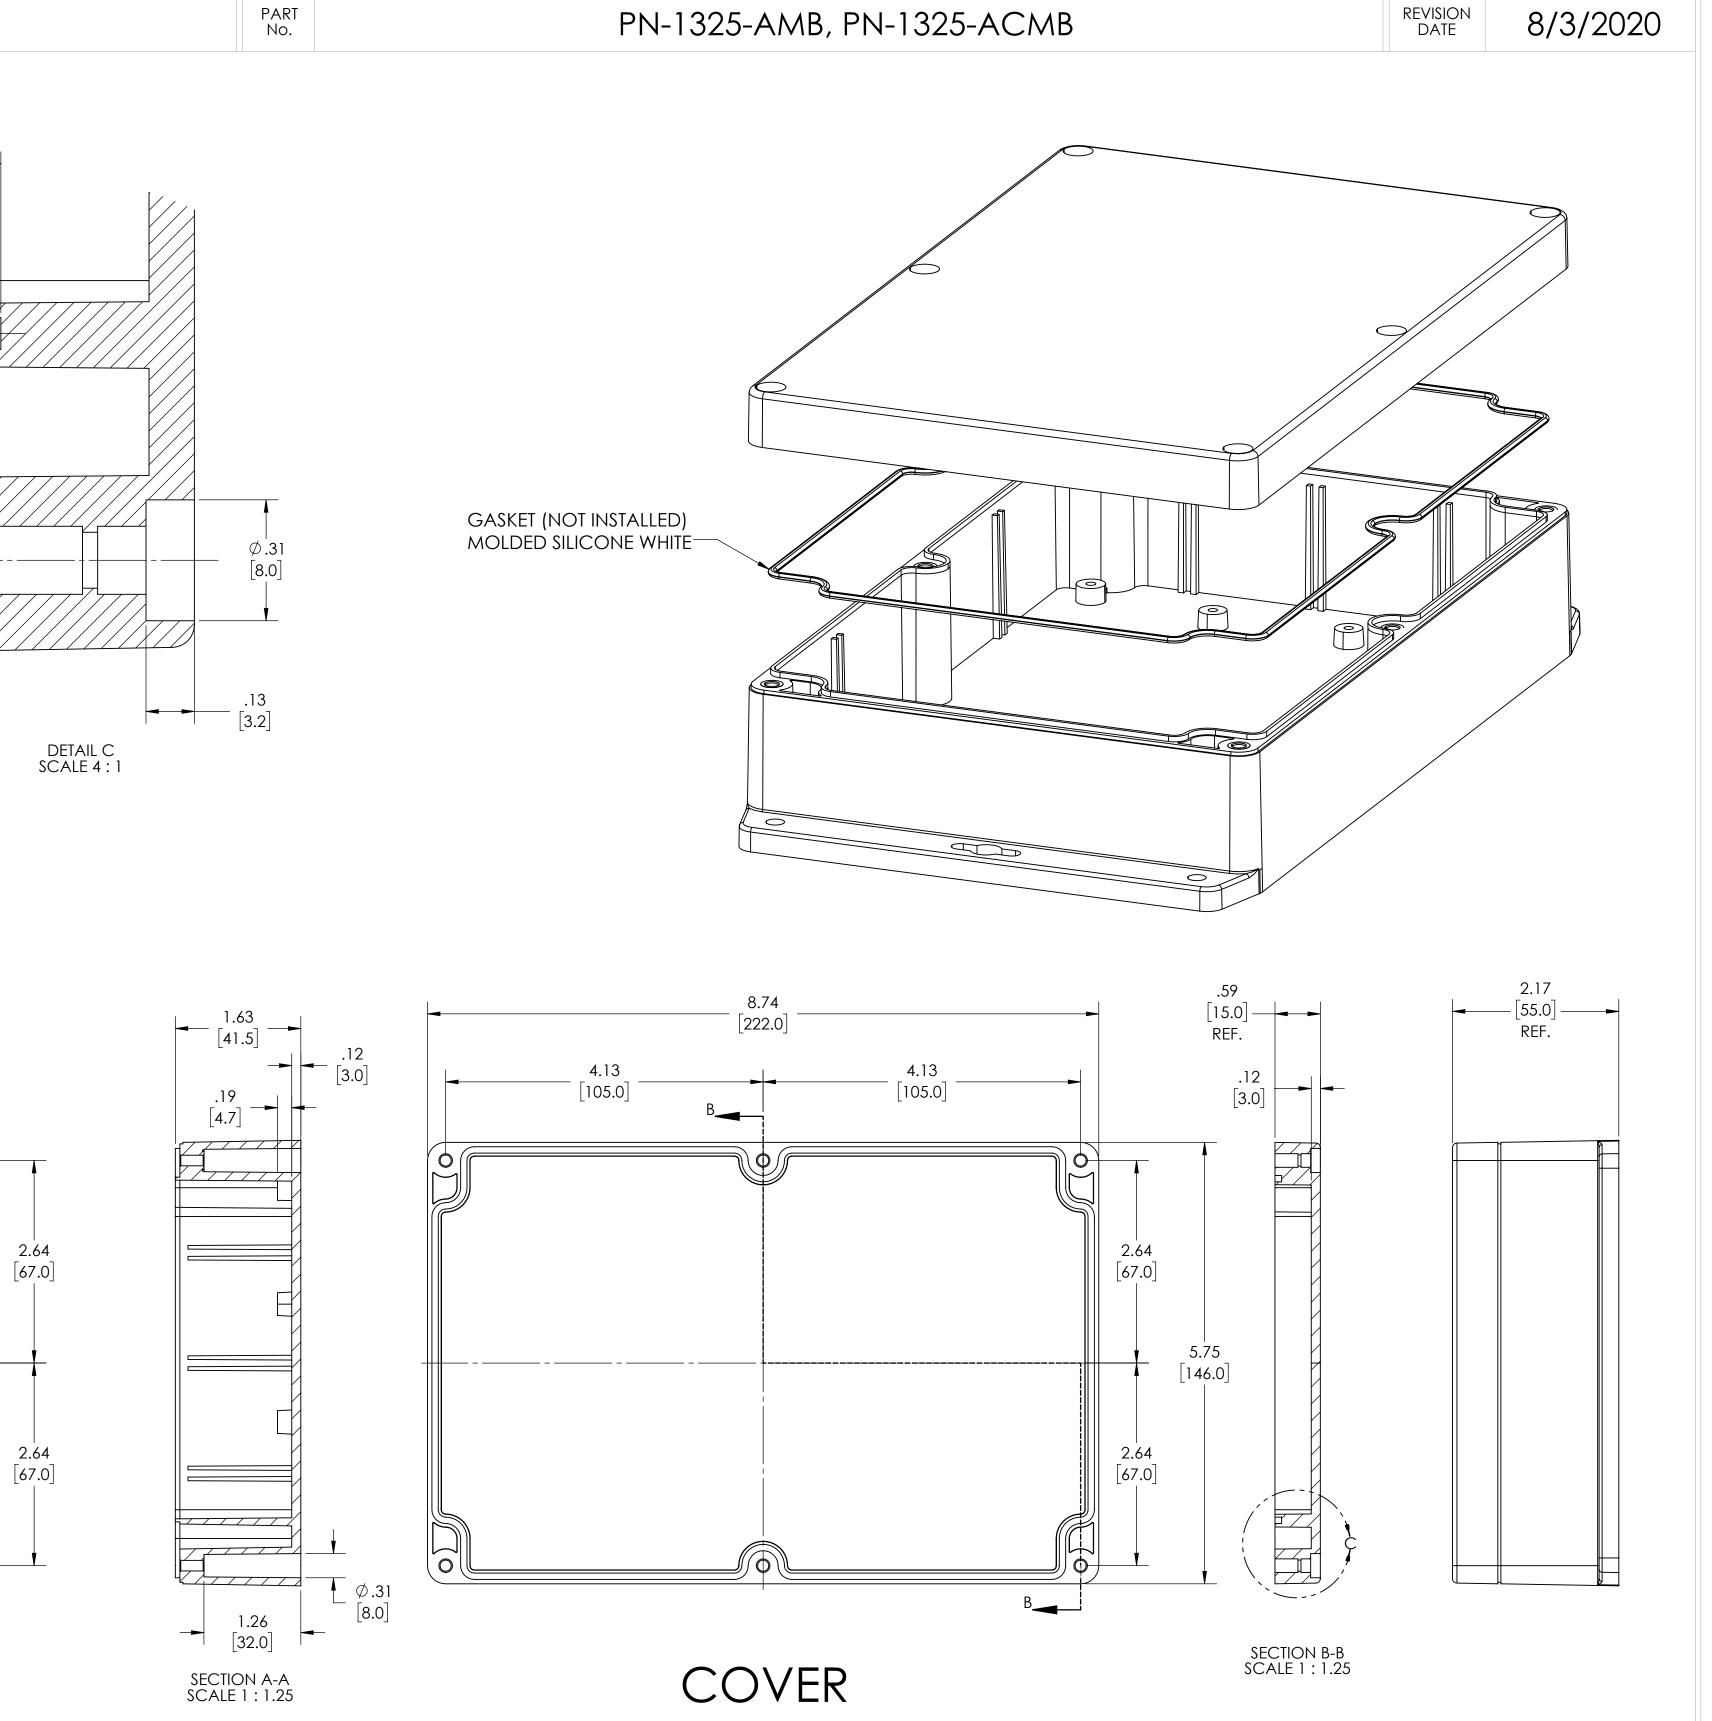

AWING FOR REFERENCE E RIGHT TO MAKE CHANGES TO OUR

TS. PLEASE CONSULT WITH BUD INDUSTRIES THIS DRAWING FOR DESIGN PURPOSE.