

ISOMETRIC


VIEW

8/14/23

NOTES:

- 1. MATERIAL AND FLAMMABILITY RATING. BODY -PC LIGHT GRAY POLYCARBONATE - UL94-5VA COVER - PC LIGHT GRAY POLYCARBONATE - UL94-5VA CLEAR COVER (C) - PC CLEAR POLYCARBONATE - UL94-V0 AND TESED TO PASS 5VA PER UL746C
- FOLLOW ENCLOSED INSTRUCTION FOR UL COMPLIANCE.: BOXES UL LISTED NEMA TYPE 1, 2, 3, 3R, 4, 4X, 5, 6, 6P 12, 13. DESIGNED MEETS IP65, IP66, IP67, IP68 REQUIREMENTS. UV RESISTANT FOR OUT DOOR USE.
- 3. OPERATING TEMPERATURE IS -35 TO 110C.
- PRE INSTALLED SILICONE GASKET IN COVER
- **BOX COMES WITH**
 - 4 UNINSTALLED MOUNTING BRACKETS
 - HARDWARE: 8 SCREWS & 4 PLUGS
- **OPTIONAL ACCESSORIES:**
 - HINGE AND PANEL SUPPENSION KIT (DPX-444KIT)
 - 8" FLANGE KIT (2 FLANGES + 4 SCREWS) (DPX-824KIT)
 - BASE INTERNAL MOUNTING PANEL (DPX-287101)
 - HINGED INTERNAL MOUNTING PANEL (DPX-287102)
 - COVER MOUNTING PANEL (DPX-287103)
 - FLOATING INTERNAL MOUNTING PANEL (DPX-287104)

DIMENSIONS ARE IN INCH

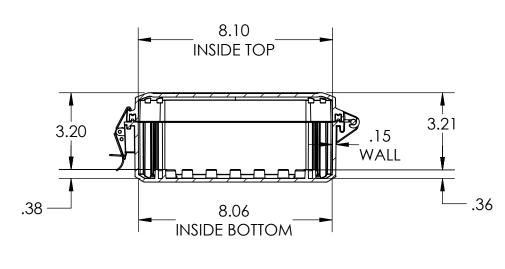

SECTION A-A

DRAWING FOR REFERENCE

WE RESERVE THE RIGHT TO MAKE CHANGES TO OUR STANDARD PRODUCTS. PLEASE CONSULT WITH BUD INDUSTRIES PRIOR TO USING THIS DRAWING FOR DESIGN PURPOSE.

