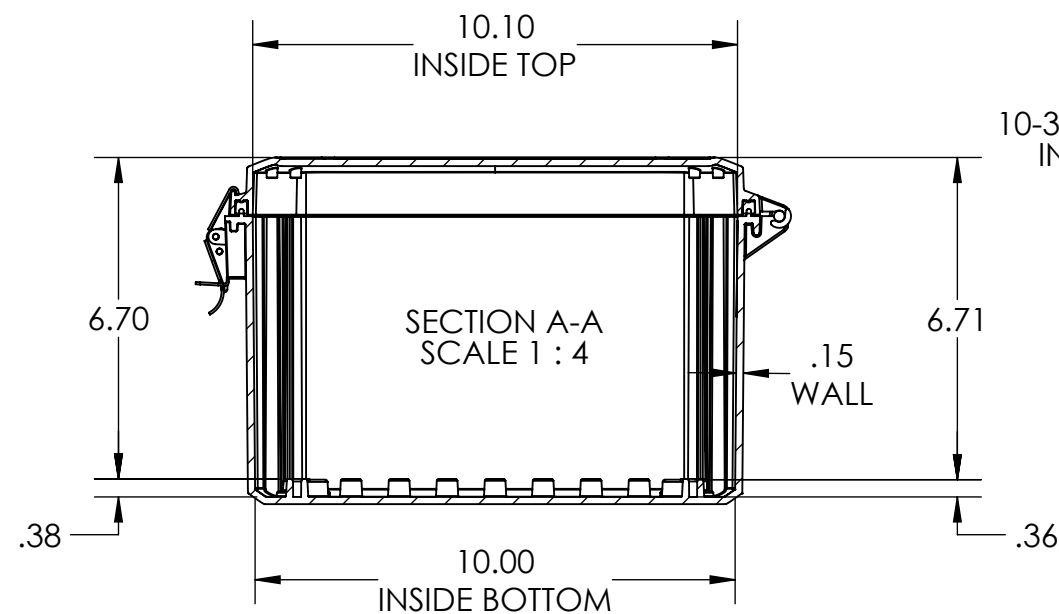
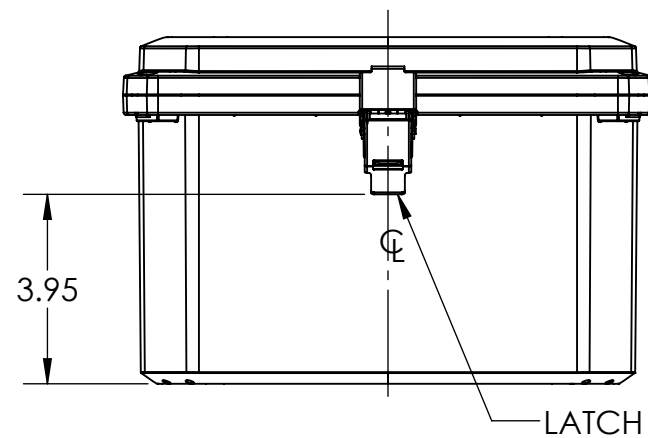
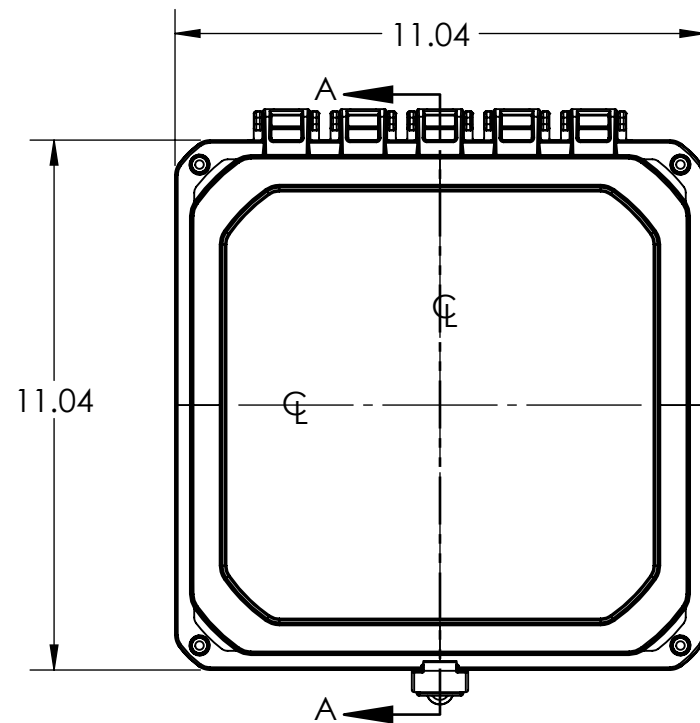
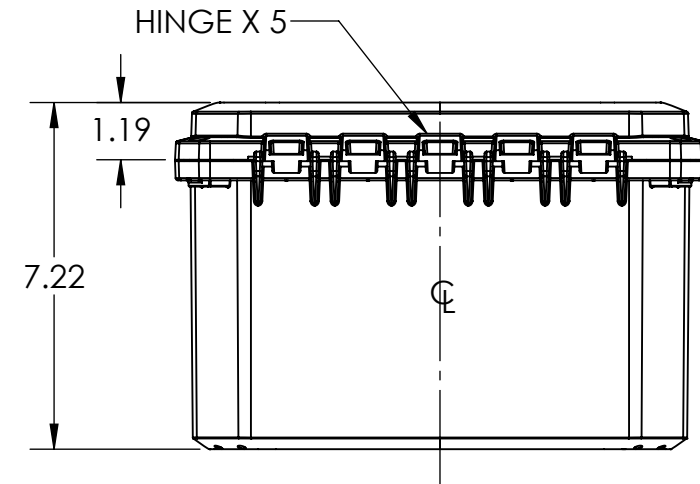
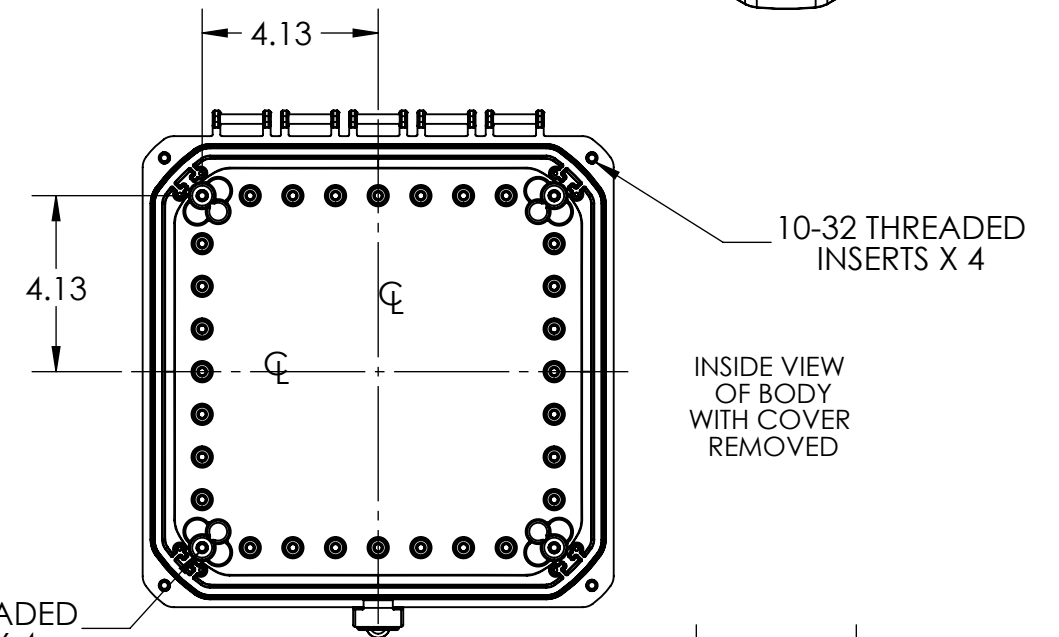
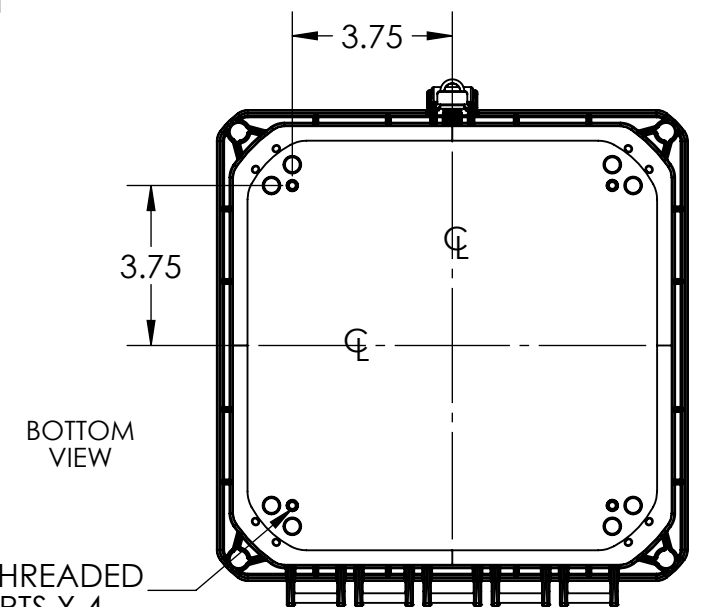


NOTES:

1. MATERIAL AND FLAMMABILITY RATING.
BODY - PC LIGHT GRAY POLYCARBONATE - UL94-5VA
COVER - PC LIGHT GRAY POLYCARBONATE - UL94-5VA
CLEAR COVER (C) - PC CLEAR POLYCARBONATE - UL94-V0 AND TESED
TO PASS 5VA PER UL746C
2. FOLLOW ENCLOSED INSTRUCTION FOR UL COMPLIANCE.: BOXES UL LISTED NEMA TYPE 1, 2,
3, 3R, 4, 4X, 5, 6, 6P 12, 13. DESIGNED MEETS IP65, IP66, IP67, IP68 REQUIREMENTS. UV
RESISTANT FOR OUT DOOR USE.
3. OPERATING TEMPERATURE IS -35 TO 110C.
4. PRE INSTALLED SILICONE GASKET IN COVER
5. BOX COMES WITH
 - 4 UNINSTALLED MOUNTING BRACKETS
 - HARDWARE : 8 SCREWS & 4 PLUGS
6. OPTIONAL ACCESSORIES:
 - HINGE AND PANEL SUPPENSION KIT (DPX-444KIT)
 - 12" FLANGE KIT (2 FLANGES + 4 SCREWS) (DPX-1224KIT)
 - BASE INTERNAL MOUNTING PANEL (DPX-287251)
 - HINGED INTERNAL MOUNTING PANEL (DPX-287252)
 - COVER MOUNTING PANEL (DPX-287253)
 - FLOATING INTERNAL MOUNTING PANEL (DPX-287254)
7. DIMENSIONS ARE IN INCH

10-32 THREADED
INSERTS X 4INSIDE VIEW
OF BODY
WITH COVER
REMOVEDBOTTOM
VIEW

DRAWING FOR REFERENCE

WE RESERVE THE RIGHT TO MAKE CHANGES TO OUR
STANDARD PRODUCTS. PLEASE CONSULT WITH BUD INDUSTRIES
PRIOR TO USING THIS DRAWING FOR DESIGN PURPOSE.