

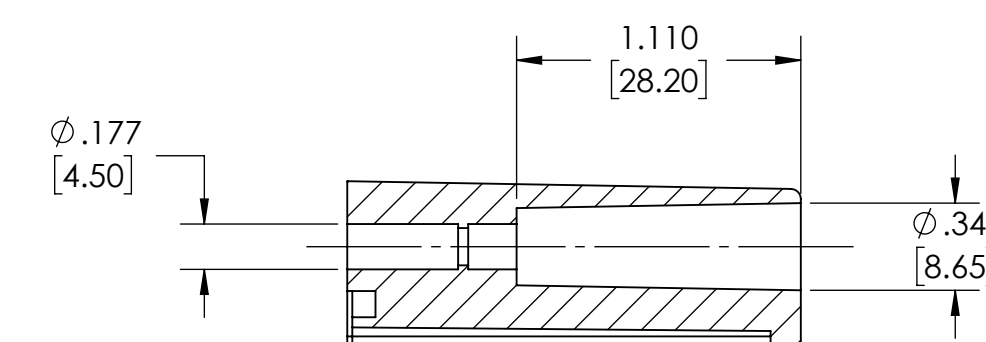
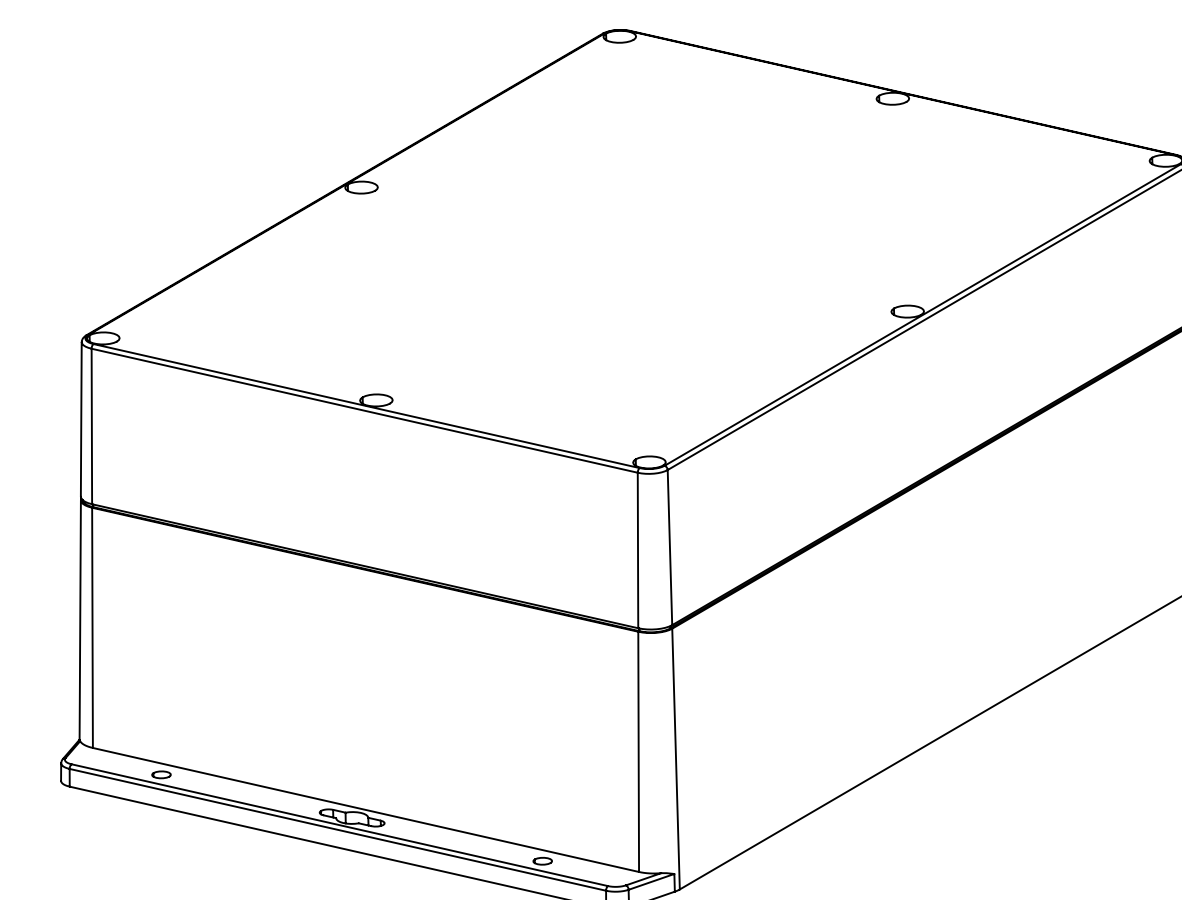
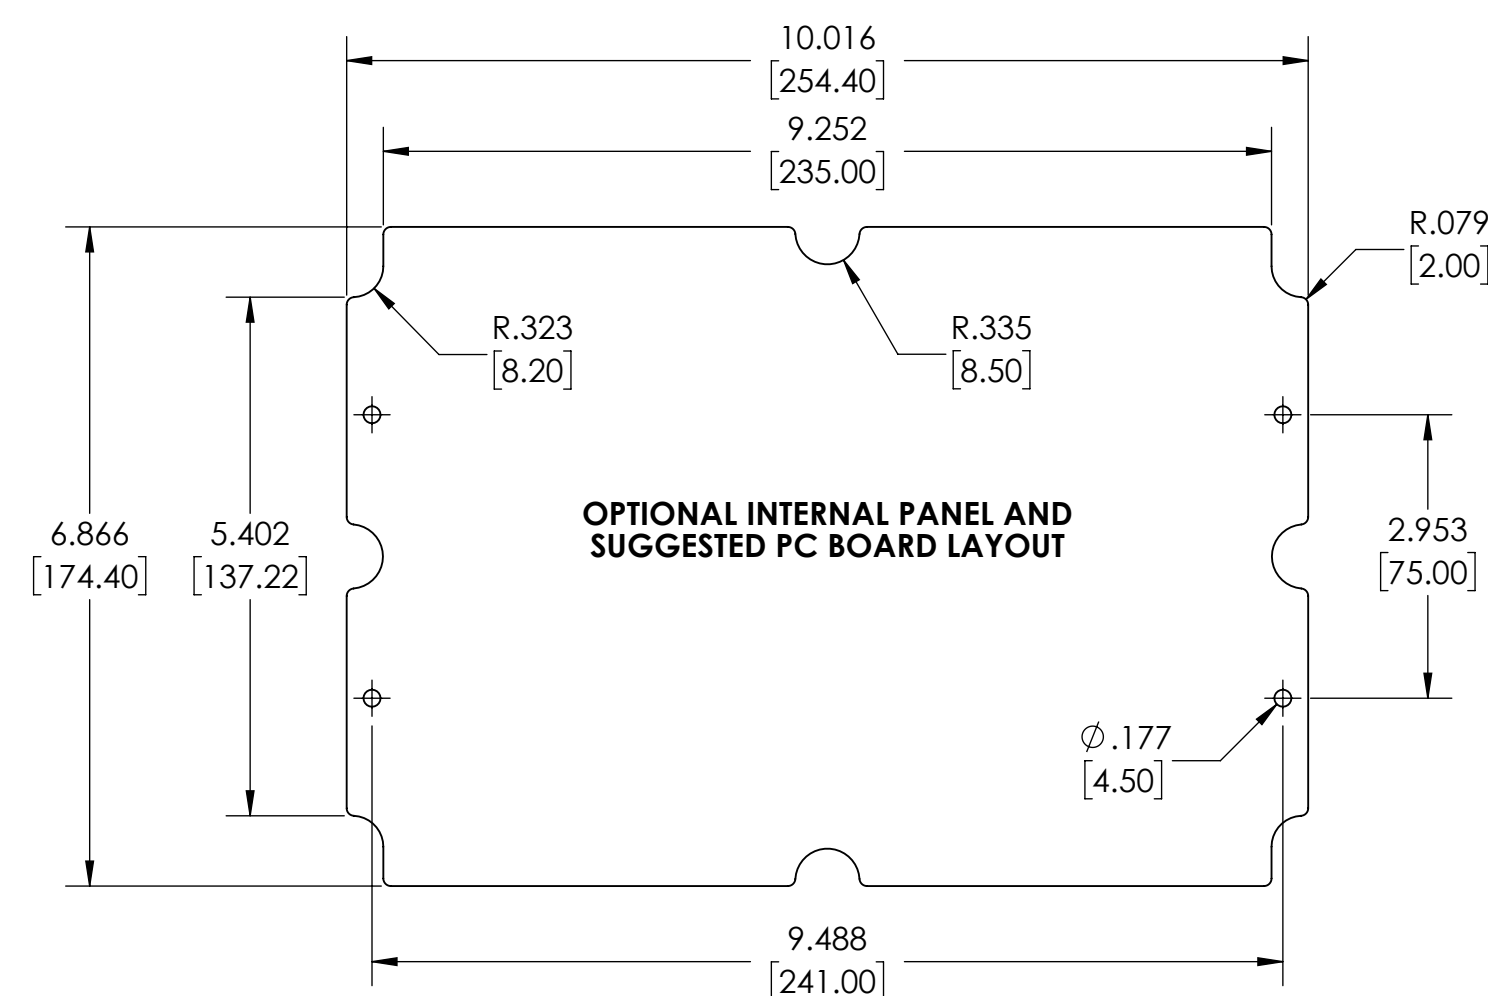




1. MATERIAL AND FINISH:
 - MB - POLYCARBONATE UL94-HB, UV STABILIZED, SERVICE TEMPERATURE RANGE: -40° TO 120 °C, LIGHT GRAY BODY & COVER
 - CMB - SAME AS -MB EXCEPT CLEAR COVER.
 - DGMB - ABS (DARK GRAY) SERVICE TEMPERATURE RANGE: -40 °C TO +80 °C
2. DESIGNED MEETS IP65 OF IEC 529.
3. UL LISTED (E194432) NEMA 1, 2, 4, 4X, 12, AND 13
4. GASKET (PRE-INSTALLED) SILICON SPONGE STRIP GASKET

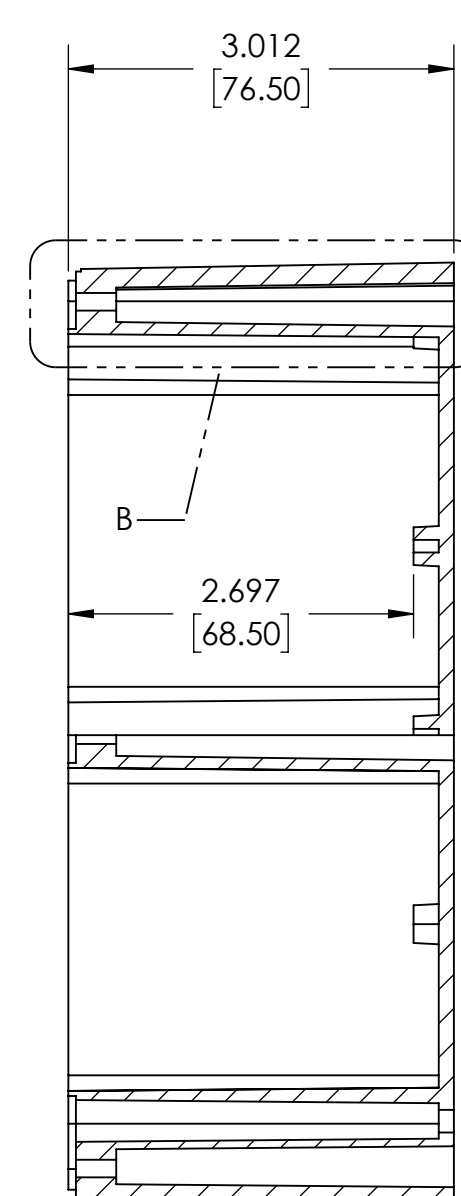

DETAIL D
SCALE 2:1.5

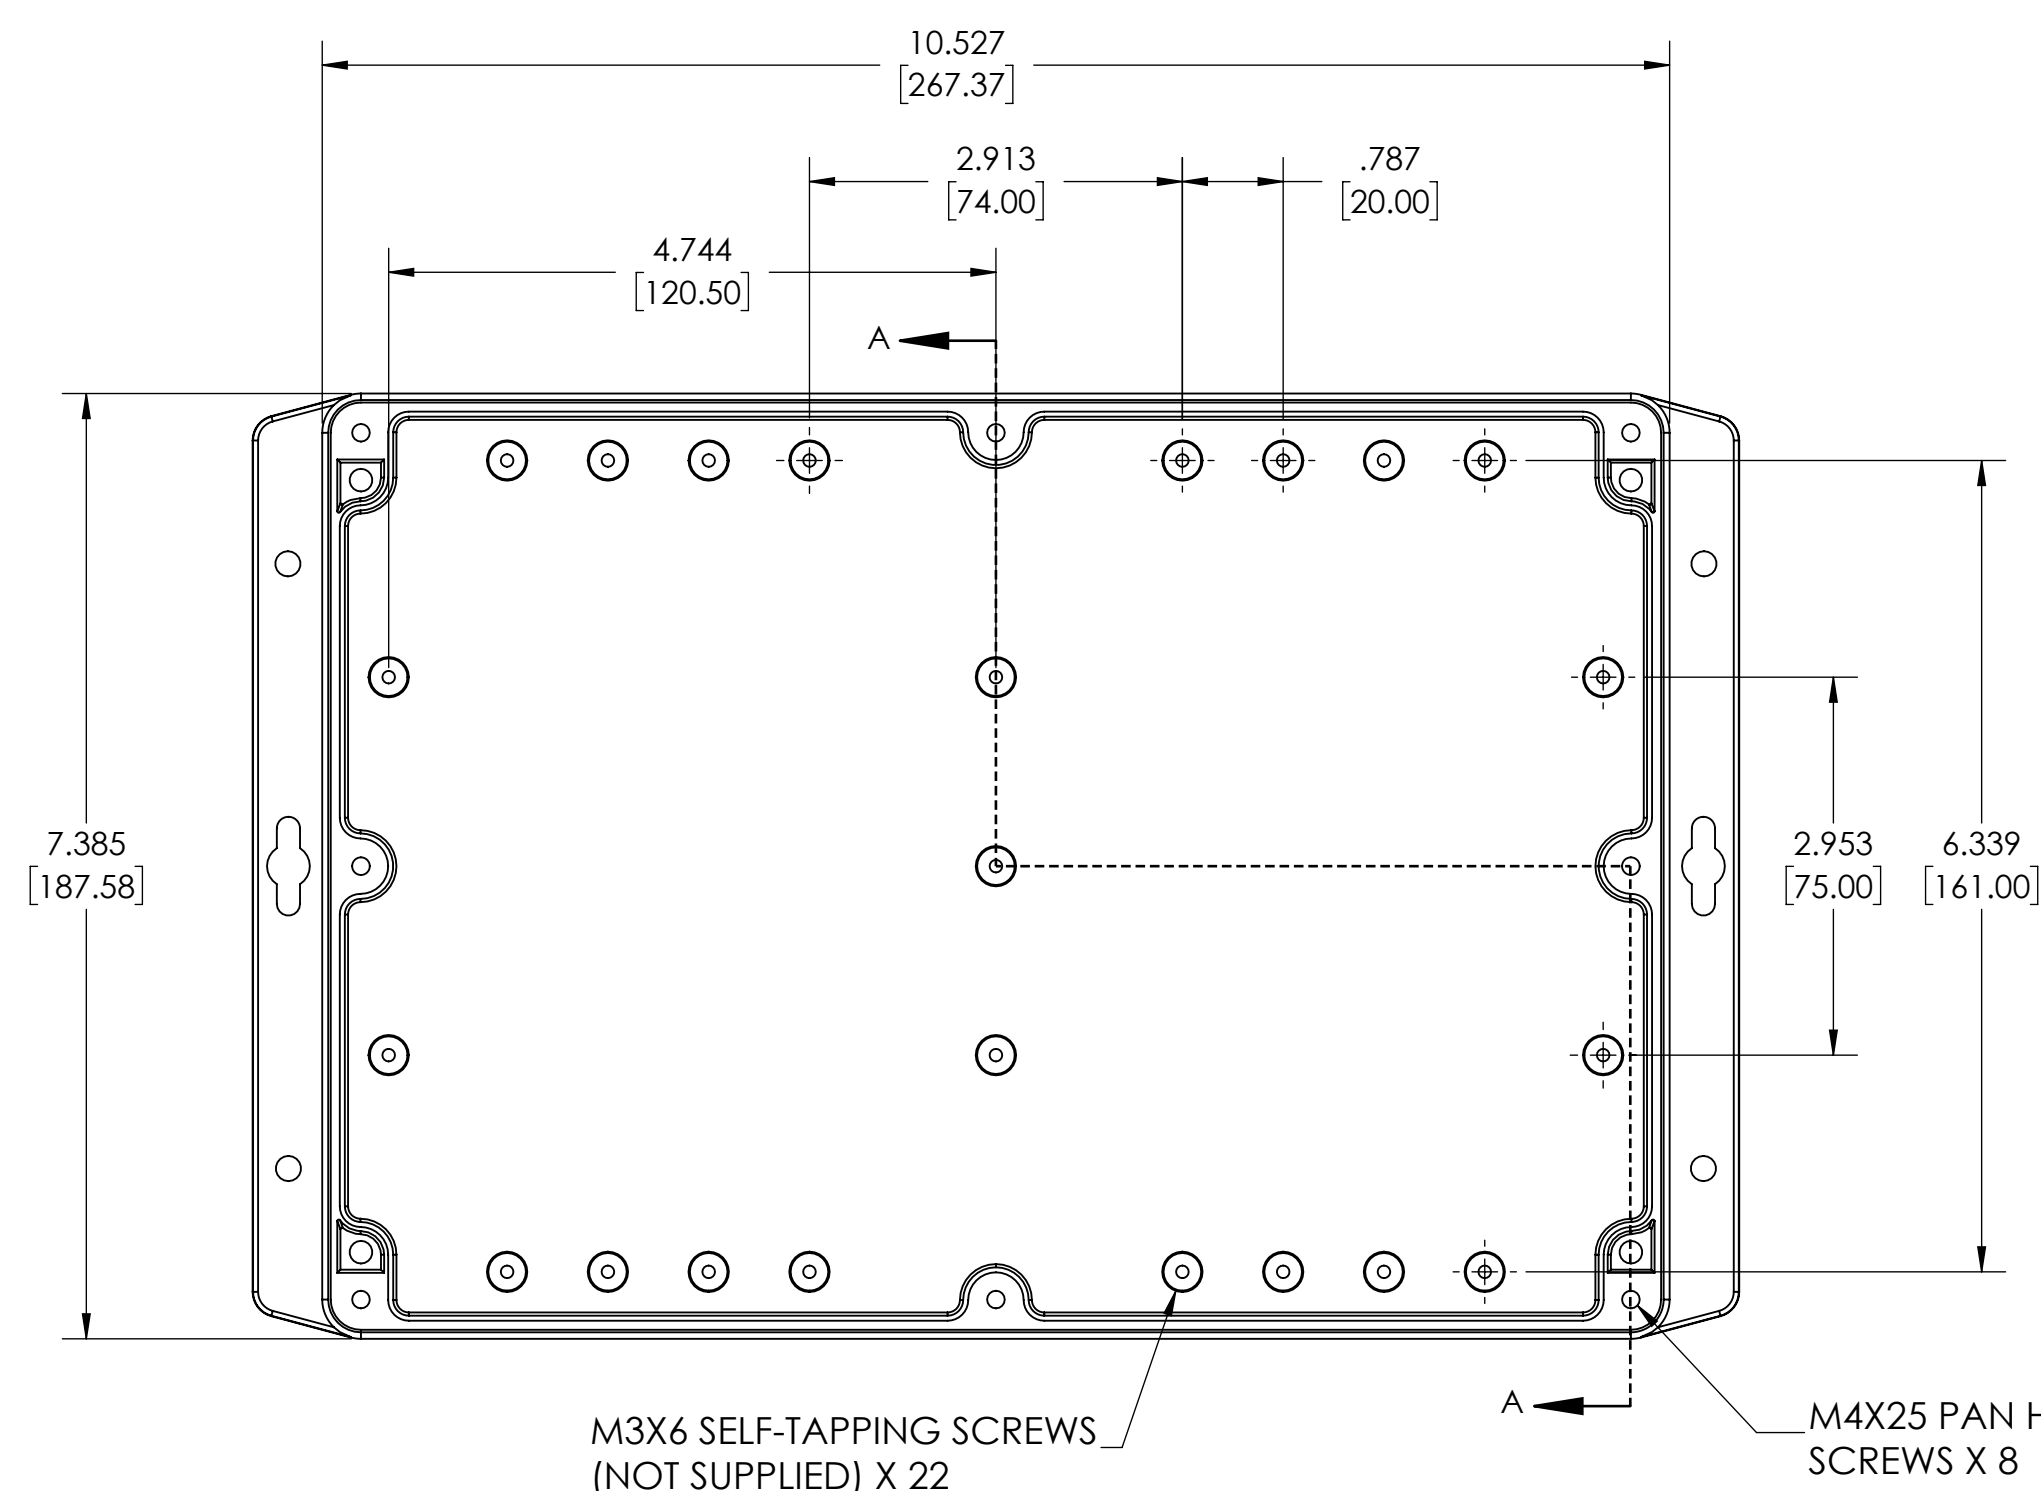

SECTION A-A

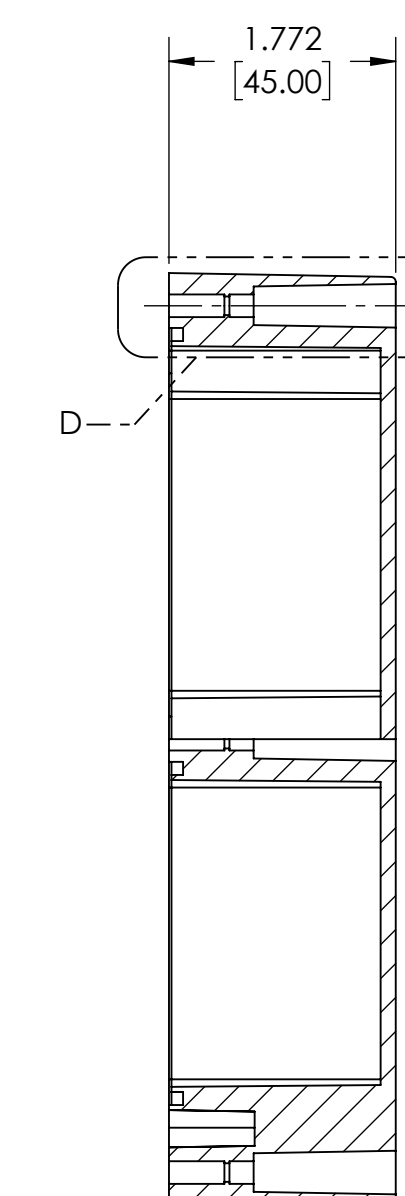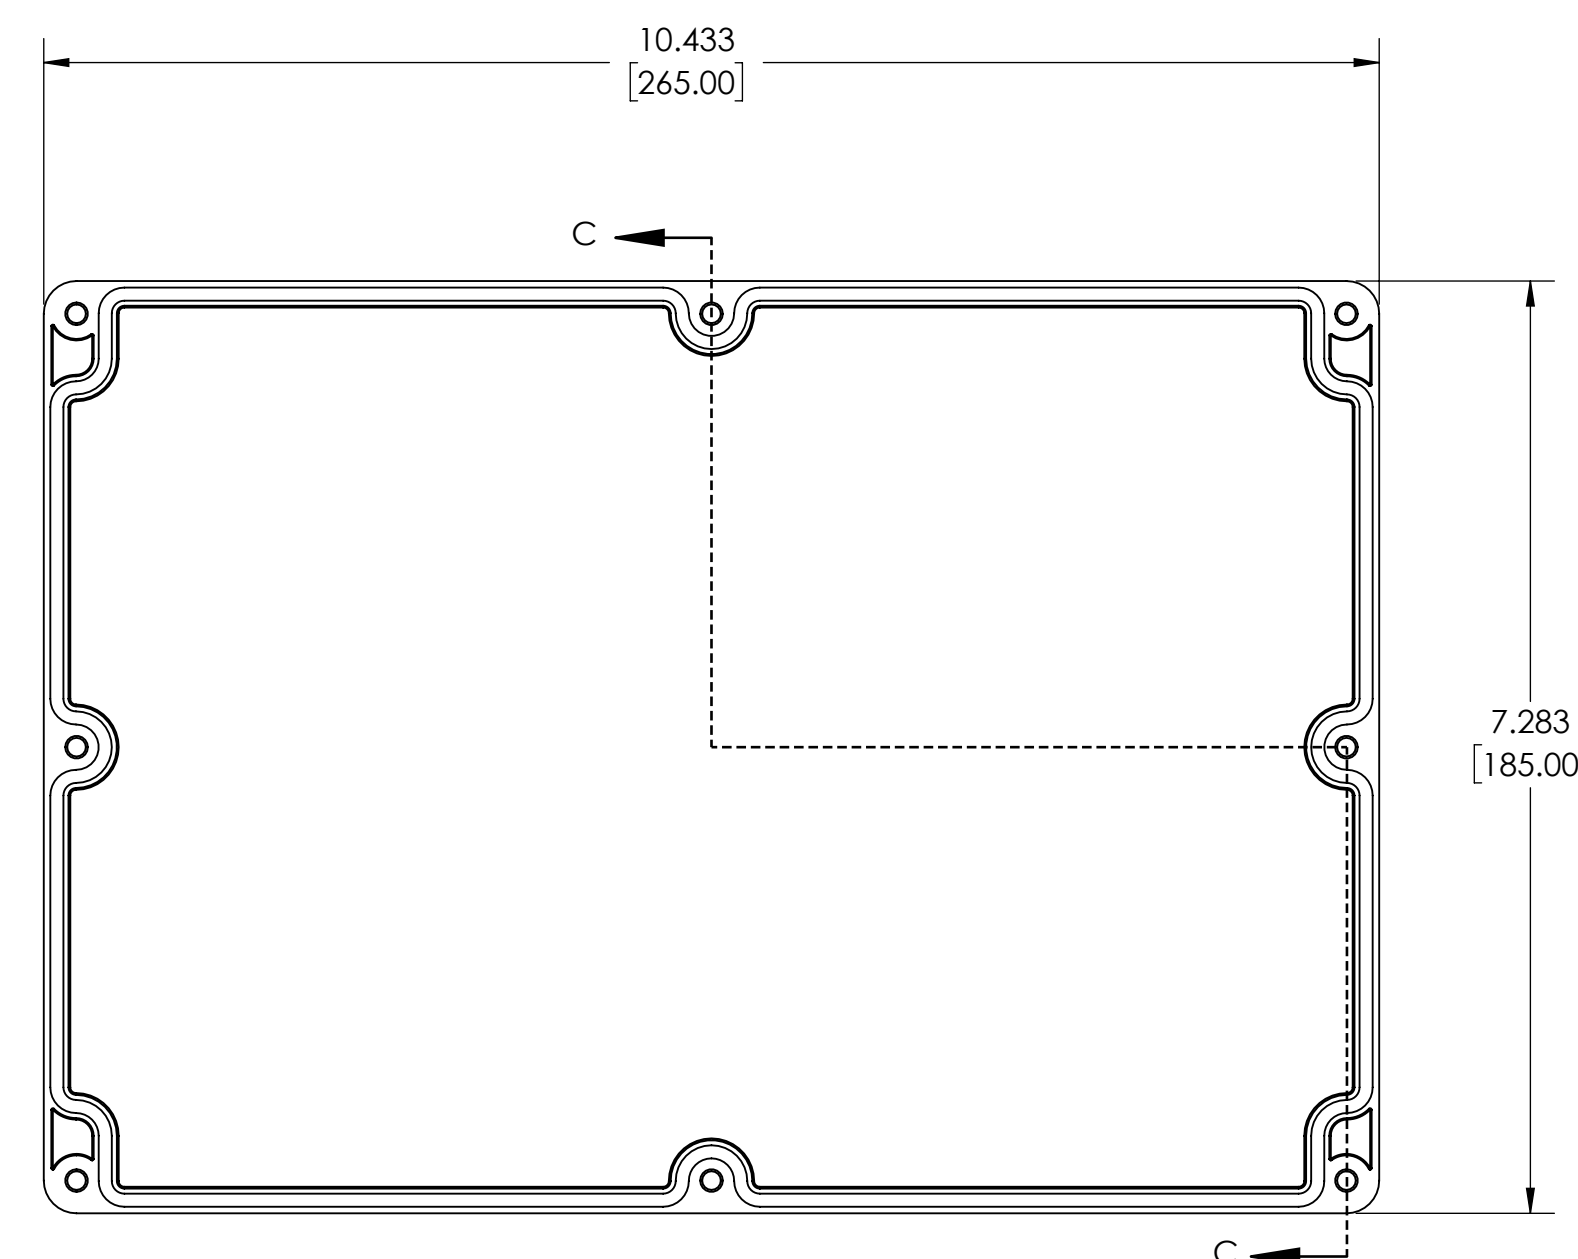

SECTION C-C

BODY

COVER

DRAWING FOR REFERENCE
WE RESERVE THE RIGHT TO MAKE CHANGES TO OUR
STANDARD PRODUCTS. PLEASE CONSULT WITH BUD INDUSTRIES
PRIOR TO USING THIS DRAWING FOR DESIGN PURPOSE.