

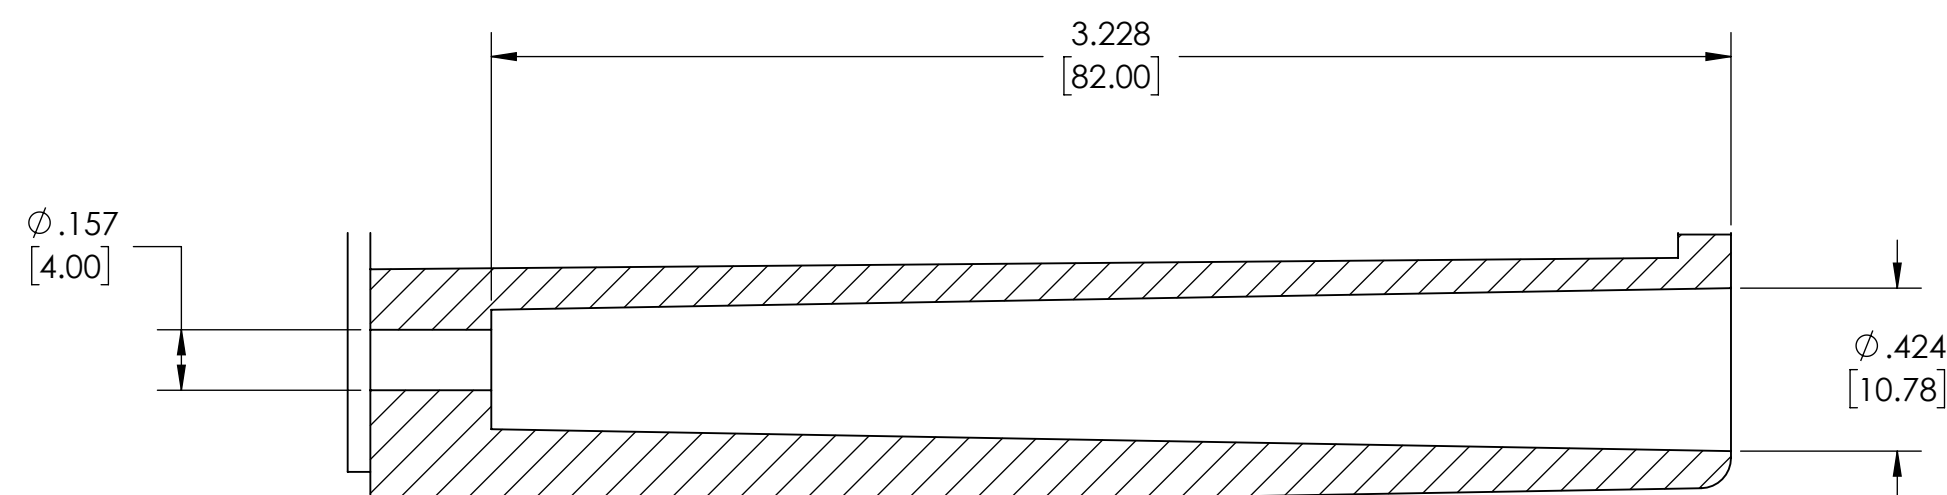
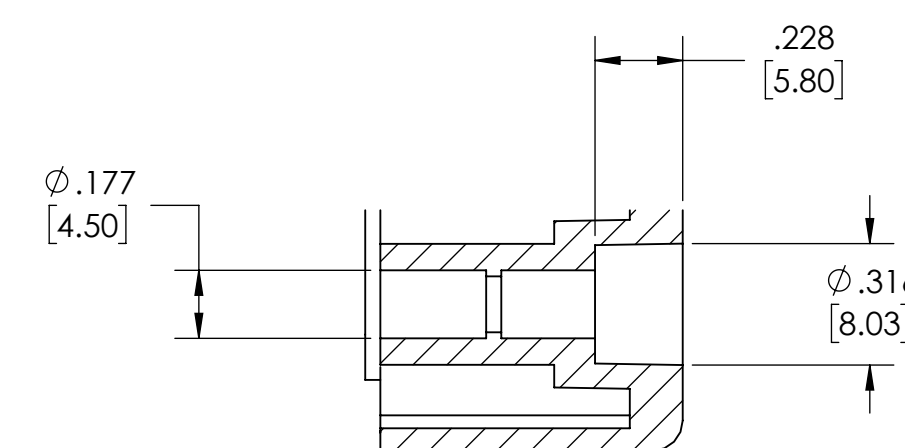


NOTES:


1. MATERIAL AND FINISH:
POLYCARBONATE UL94-HB, UV STABILIZED, SERVICE TEMPERATURE
RANGE: -40°C TO 120°C, LIGHT GRAY BODY & COVER
-C - SAME AS EXCEPT CLEAR COVER.
ABS (DARK GRAY) SERVICE TEMPERATURE RANGE: -40°C TO +80°C
2. DESIGNED MEETS IP65 OF IEC 529.
3. UL LISTED (E194432) NEMA 1, 2, 4, 4X, 12, AND 13
4. GASKET (PRE-INSTALLED) SILICON SPONGE STRIP GASKET

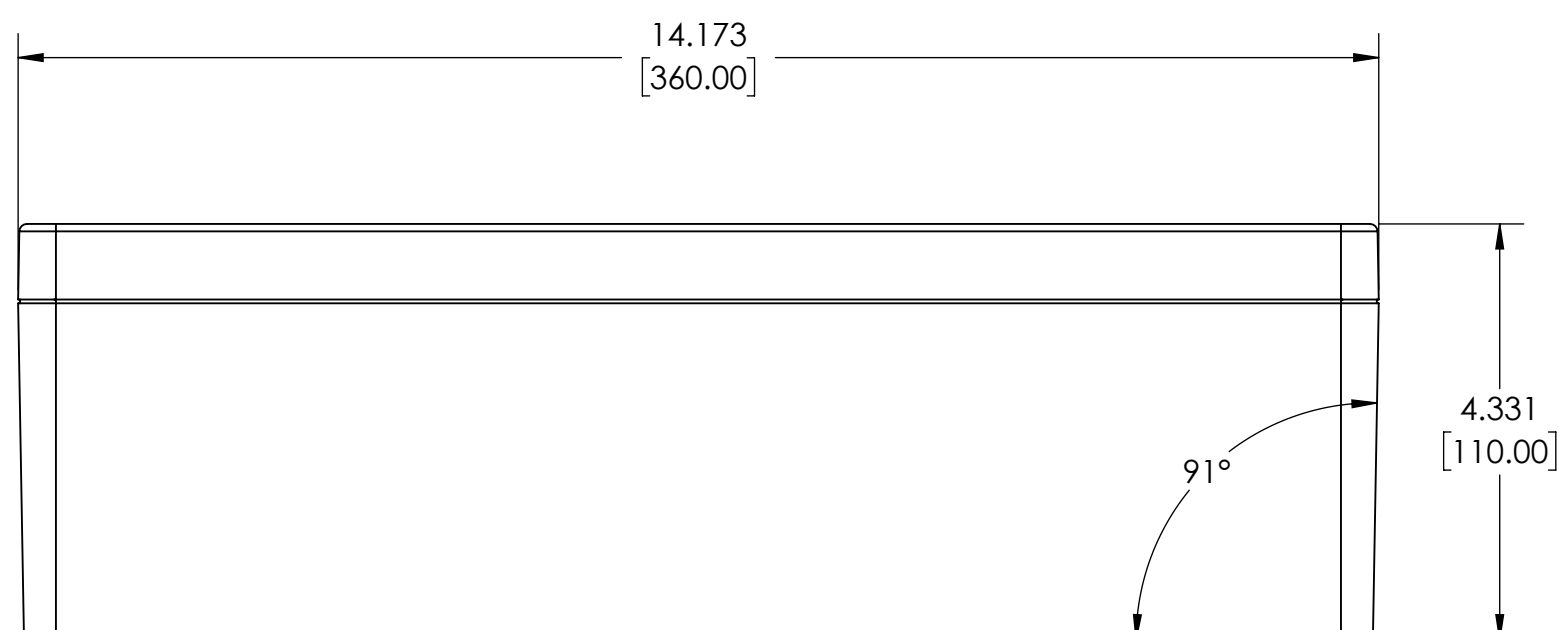


DETAIL B

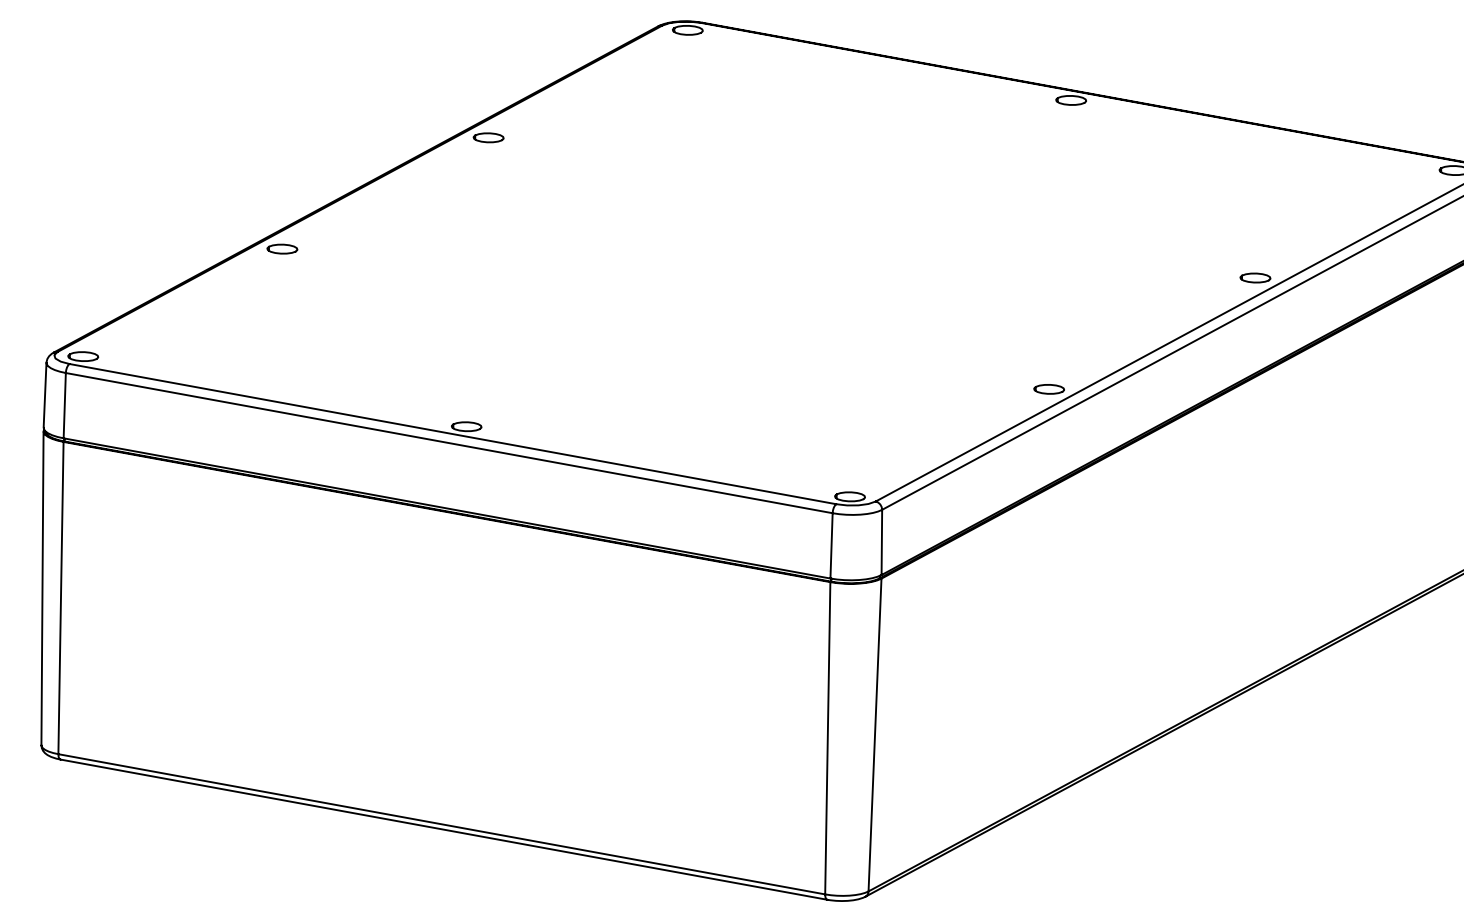


DETAIL D

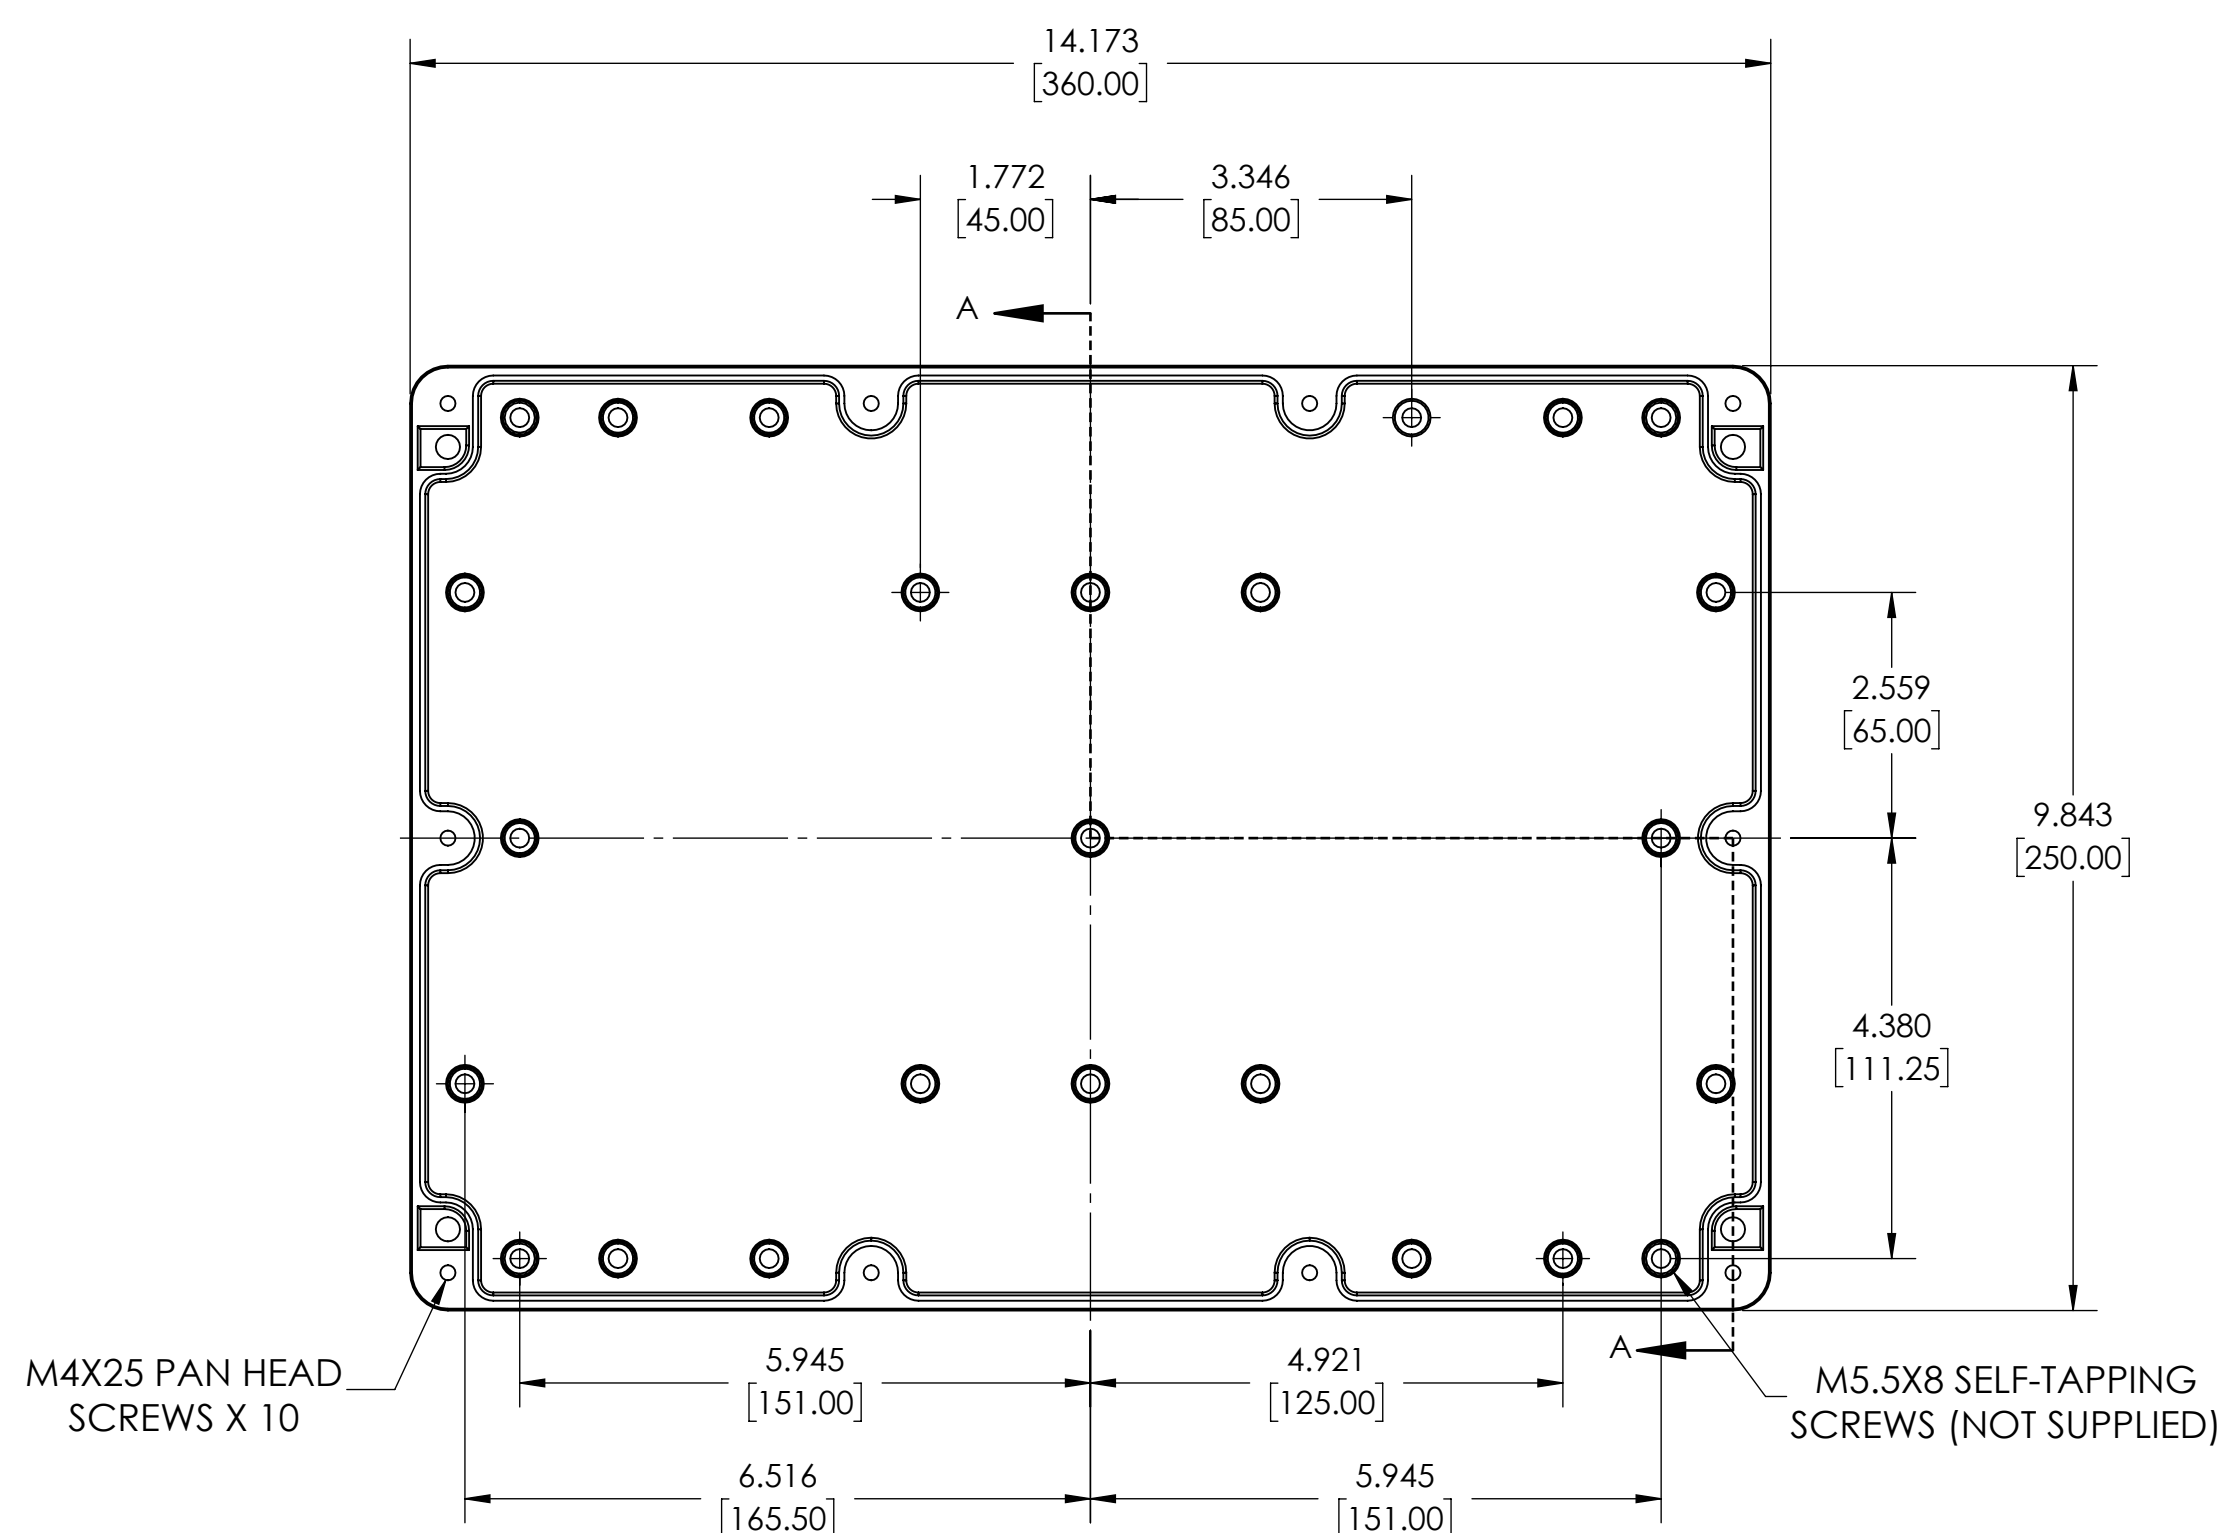


BODY

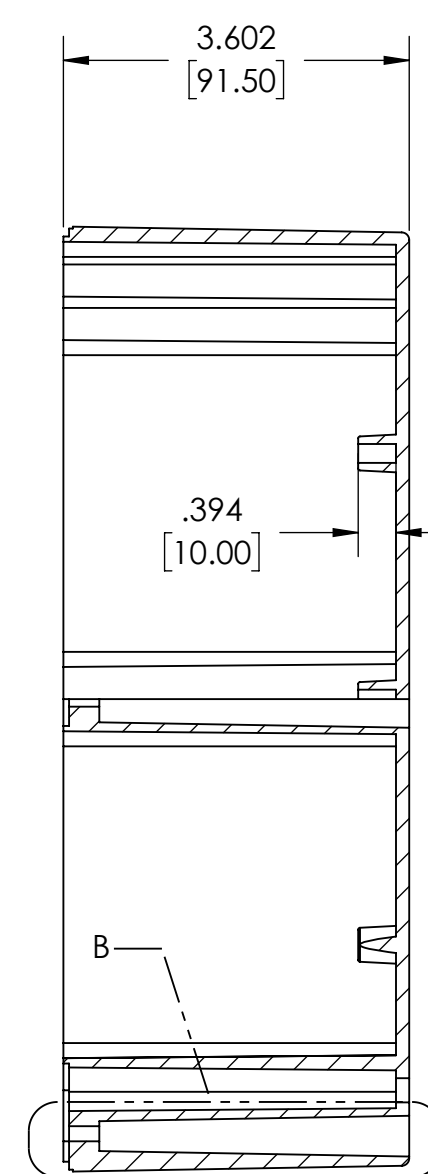

SECTION A-A

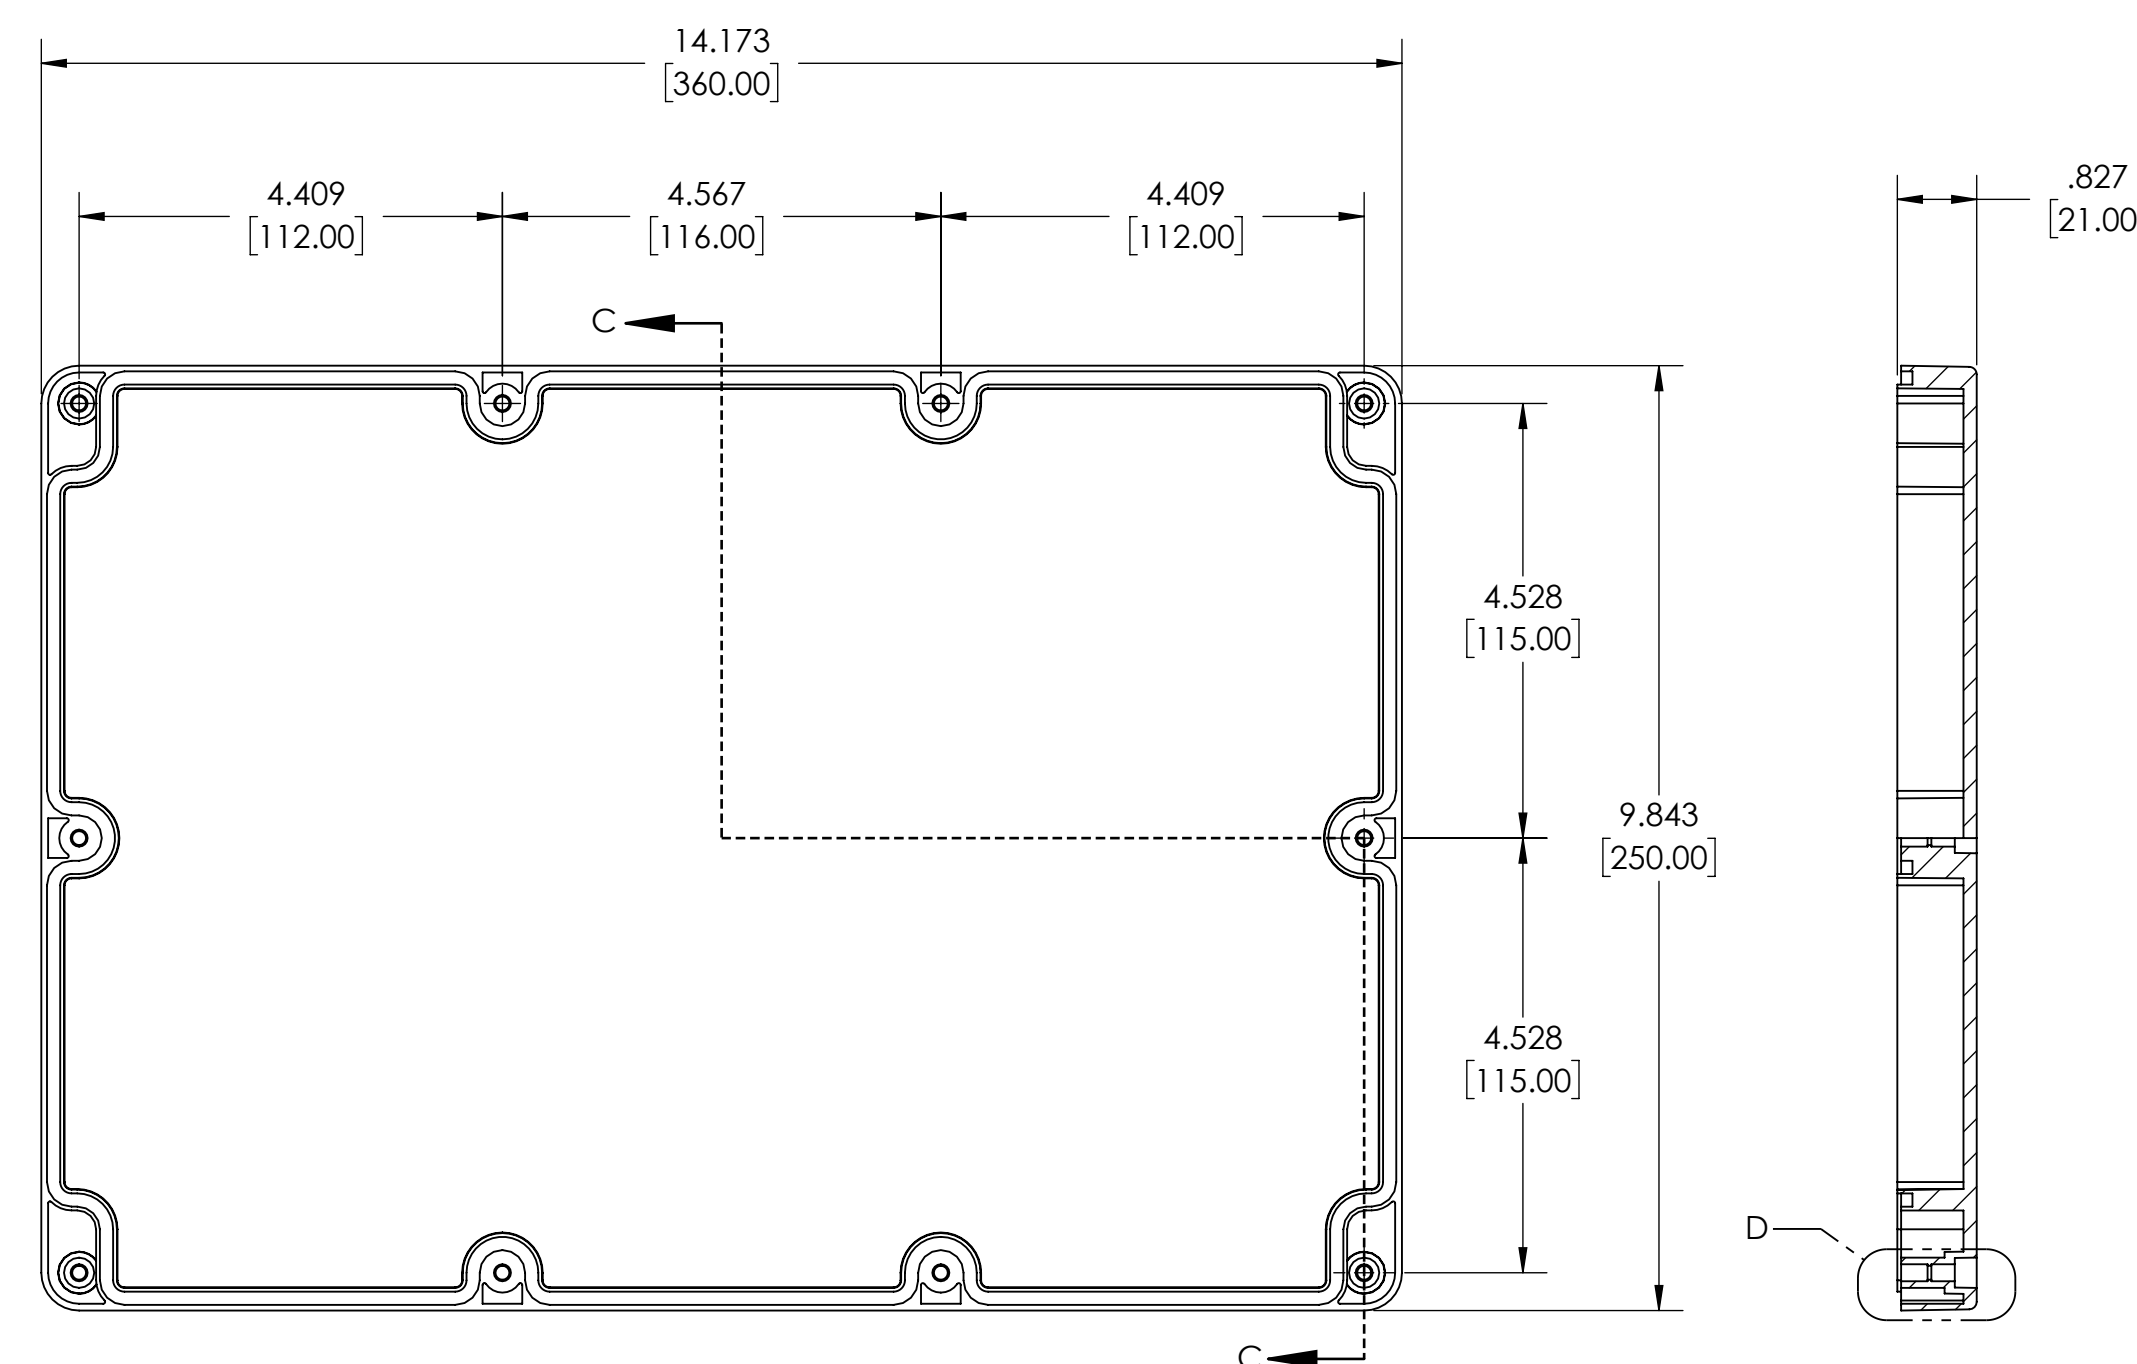

COVER

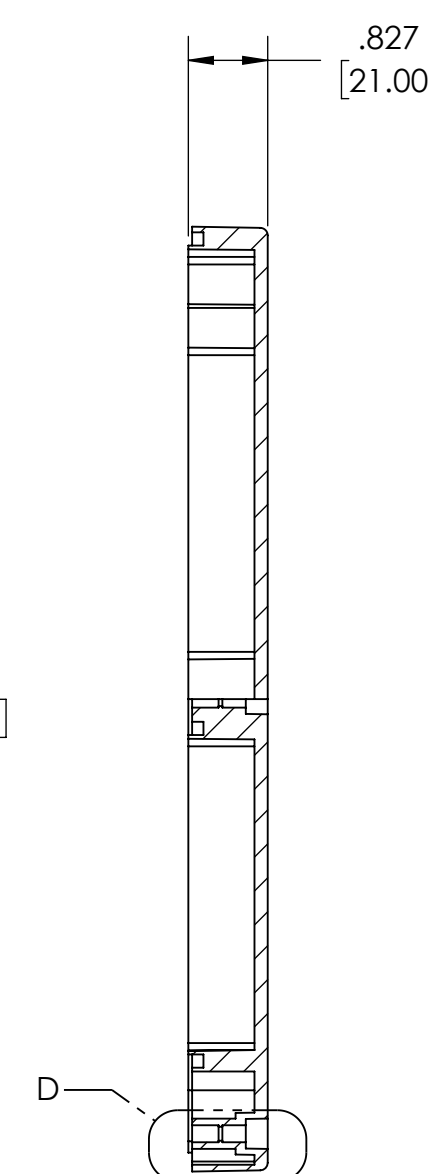

SECTION C-C

DRAWING FOR REFERENCE
WE RESERVE THE RIGHT TO MAKE CHANGES TO OUR
STANDARD PRODUCTS. PLEASE CONSULT WITH BUD INDUSTRIES
PRIOR TO USING THIS DRAWING FOR DESIGN PURPOSE.